



HMAC PAVEMENT


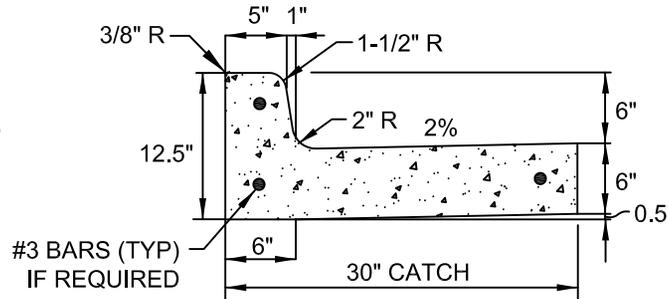


NOTES:


1. REINFORCEMENT IS NOT REQUIRED ON RESIDENTIAL COLLECTOR AND LOCAL STREETS.
2. SEE PAVING AND DRIVEWAY GENERAL NOTES FOR MORE INFORMATION.
3. INSERT #3 DOWEL (3/8" Ø DEFORMED BARS) TO A MINIMUM 4" DEPTH IN EXISTING CONCRETE CURB AND GUTTER.
4. EXPANSION JOINTS SHALL BE SEALED WITH APPROVED MATERIAL.

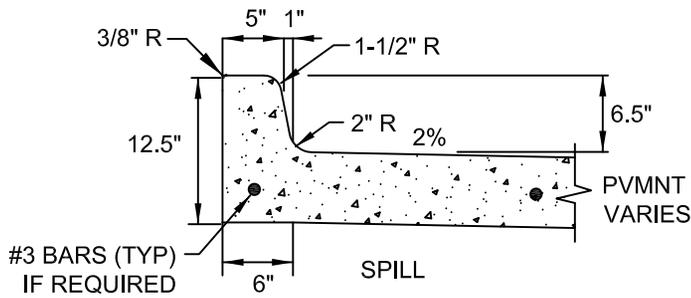


CONCRETE PAVEMENT

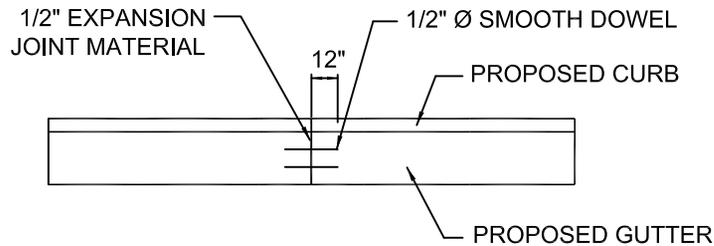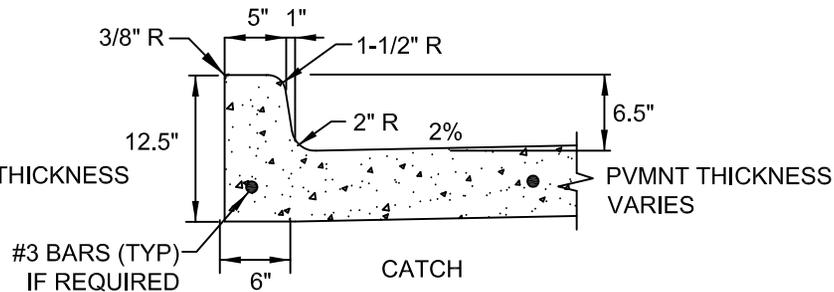

DOWEL DETAIL "A"  
NEW CURB AND GUTTER  
PLAN VIEW

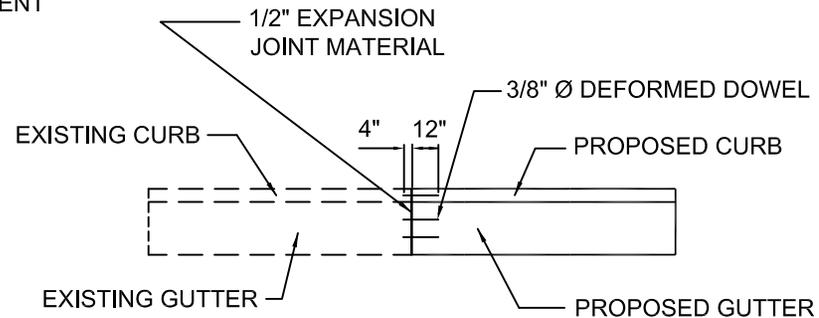

DOWEL DETAIL "B"  
EXTENSION OF EXISTING CURB AND GUTTER  
PLAN VIEW



**CITY OF TYLER**  
STANDARD DETAIL

**CURB AND GUTTER**

APPROVED: C. D. Dill  
CITY ENGINEER

REVISION DATE: 06/13/14